

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 660 569 A1

(12)

EUROPEAN PATENT APPLICATION(21) Application number: **93480231.5**(51) Int. Cl.⁶: **H04L 12/56**(22) Date of filing: **22.12.93**

(43) Date of publication of application:
28.06.95 Bulletin 95/26

(94) Designated Contracting States:
DE FR GB

(71) Applicant: **INTERNATIONAL BUSINESS
MACHINES CORPORATION**
Old Orchard Road
Armonk, N.Y. 10504 (US)


(72) Inventor: **Bertin, Olivier**

53, Bd de Montréal**F-06200 Nice (FR)**Inventor: **Mauerl, Olivier****15, rue Forville****F-06110 Le Cannet (FR)**

(74) Representative: **Klein, Daniel Jacques Henri**
Compagnie IBM France
Département de Propriété Intellectuelle
F-06610 La Gaude (FR)

(54) **Method and system for improving the processing time of the path selection in a high speed packet switching network.**

(57) The routing paths between origin and destination nodes in a packet switching network are selected more efficiently by reducing the total number of links potentially visited by the routing algorithm. The path selection technique involves two phases, the first phase for principal links identification, and the second phase for selection of the best point-to-point path in the network. Principal paths are minimum hop count paths with a transmission delay less than a specified threshold. The algorithm limits the screening of the network links in the second phase to the principal links and excludes the secondary links. The exploration of a much smaller number of links has the advantage to considerably reduce the computation time required for the path selection. The fact the number of principal links is generally small compared with the total number of links potentially explored, allows to limit the additional processing time necessary in case of unsuccessful attempt.

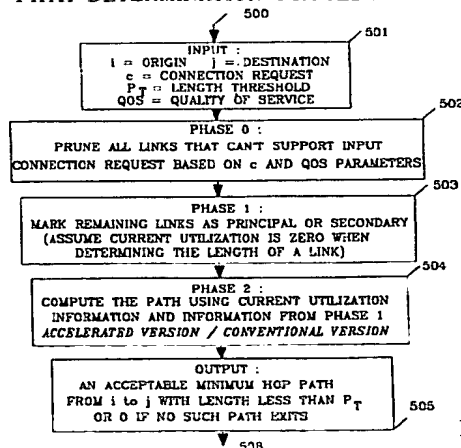PATH DETERMINATION PROCEDURE**FIGURE 5****EP 0 660 569 A1**

Technical field

The present invention relates to a high speed transmission system in a large packet switching network and, more particularly, to an apparatus and a method for accelerating the path selection between a source and a destination node by reducing the total number of links potentially explored by the Modified Bellman-Ford Algorithm.

Background art

It has become increasingly useful to interconnect a plurality of data processing elements by means of a packet switching network in which data is transmitted as data assemblages called "packets". Such networks include a plurality of interconnected switching nodes which, in turn, are connected to end nodes supporting data processing equipments. Such packet networks can become quite large with an extensive geographical distribution. In such a situation, the selection of an efficient path between two end nodes which wish to communicate with each other becomes of paramount importance. Different methods are summarized by H. Nussbaumer in *Teleinformatique II (pages 92 to 117) Presses Polytechniques Romandes 1987*.

Path Selection

The general problem which must be solved at the network level is to find a path between a source and a destination node. When the network is using datagrams, the path selection must be done individually for each packet. For virtual circuits, the path decision is done once only at the time of the circuit establishment. In both cases, the choice of a routing algorithm is not easy because it must satisfy a large number of often conflicting requirements. This algorithm must be simple to implement to not complicate the nodes realization, it must ensure a correct progress of the packets whatever the disturbance on the network. The algorithm must be able to provide satisfying results despite of the traffic variations and the network topology. It must also ensure the equity between the different end users and provide an equal distribution of the rights to access the network. At last, the routing algorithm must allow, when possible, to exploit the network in an optimal way, according to a criterion which can vary with the utilization type. In most of the cases, the network is realized in a way to minimize the packet transit time and to transfer the maximum number of packets. In other cases, the objective is to decrease the communication cost, or to develop a reliable network able to operate correctly either in case of catastrophic line, node failure or peaks of traffic.

Because of the variety of the constraints, there are a large number of different routing types like Flooding Routing, Random or Stochastic Routing, Deterministic Routing. This last technique is one of the most widely used. Two modes of operation are opposed : the Fixed Routing and the Adaptive Routing.

Fixed Routing

The Fixed Routing defines paths that must take the different packets according to the general network characteristics such as the network topology and the mean traffic expected on the communication lines. The routing rules are established once and aims for optimizing the performance criterion privileged by the user. The Fixed Routing is very simple in its principles and allows to considerably speed up the packet transmission through the network.

Adaptive Routing

Contrary to the Fixed Routing, the purpose of the Adaptive Routing is to satisfy at any time the optimization criterion. The tables are permanently updated according to, for example, the instantaneous state of the traffic on the lines.

- Centralized Routing

When the characteristics of the network fluctuate, it is possible to adapt the routing by assigning to one node the responsibility to update periodically the routing tables according to the traffic variations and the topology. This method, simple in its principles, is called Centralized Routing. Its principal disadvantage is to generate an important auxiliary traffic and to subordinate the good functioning of the network to only one node. Furthermore, the Centralized Routing can generate some problems at the time the tables are refreshed because said tables cannot be received at the same time by all the nodes. A solution is to decentralize the tables establishment at the level of each node.

5

10

High Performance Networks

Throughput

40 In order to minimize the processing time and to take full advantage of the high speed/low error rate technologies, most of the transport and control functions provided by the new high bandwidth network architectures are performed on an end-to-end basis.

45

- Source Routing

3

through the network as a self contained unit and is independent of all other packets. The key point for the source node is to determine for each datagram the optimal route in the shorter lapse of time.

- **Label Swapping**

The Label Swapping is a particular implementation of the Distributed Routing for connection oriented networks. These networks typically multiplex many connections (or sessions) on a link using some form of logical "channel". Each packet sent on the link has a header which includes an arbitrary number identifying which logical connection that this packet belongs to.

The call set up and the resource reservation process comprises the following steps :

- **A connection request** is specified by the user via a set of parameters including origin and destination address and data flow characteristics.
- **The path determination** is realized by the source node from its local routing Topology Database
- **The route reservation** is sent out in a special message along the specified nodes. Said message, which is usually routed according to the previously described Source Routing technique, signals the nodes to set up their connection tables and to reserve their resources to provide the level of service required by the traffic type (for example, a bandwidth reservation on each of the links of the path).
- **The tables update** reflects the changes in the availability of the network resources. The information is sent to every node in the network.

The Label Swapping technique requires that the connection tables be set up and maintained dynamically. That means that when a new connection is established or an old one is terminated the tables are updated (the database of network topology can of course be maintained quite separately). This is possible if the connection set up is relatively infrequent and is not too time critical. This restriction makes datagram transport quite inefficient. However, connections that require very short packets, like real-time voice connections, can be effectively supported by this technique, because of the low packet overhead. All that is needed is a field to specify which connection is to be used for the packet.

Key requirements

The Distributed Routing mechanism in large and high speed packet switching networks supporting both connection oriented and connectionless routing modes implies some requirements in terms of performance and resource consumption which can be summarized as follows :

- the source node (or the node providing the route calculation for the source node) must be able to decide where to route an incoming packet in a very short portion of time (the computation must be sufficiently rapid to compute an optimum path for each connection request)
- the switching time in the intermediate nodes must be minimized, (minimum processing time)
- the network resources along the selected path must be optimized according to the customer criterions.
- Control messages must be as much as possible limited not to overload the network.

Path Selection Criteria

Bellman-Ford Algorithm

There are several possible adaptive routing algorithms to compute an optimal path between nodes in a packet network. The Bellman-Ford algorithm described by *D. Bertsekas and R. Gallager in Data Networks - Prentice-Hall 1987 Englewood Cliffs, New Jersey* - is one of the most currently used in fast packet packet switching networks. The objective of the algorithm is to find a path joining two nodes with the minimum length, the length being defined to reflect the congestion of the link. The algorithm starts from the source node and first find the shortest path lengths subject to the constraint that the paths contain at most one link. Then, it find the shortest path lengths with a constraint of paths of at most two links, and so forth.

Let

- N the number of nodes (labeled 1,2, ..., N).
- M the number of unidirectional links.

It is assumed that there is at most one unidirectional link going from one node to another, and so a link can be identified by its end points.

- h the number of hops,

- $D(i, h)$ the shortest ($\leq h$) path length from source node (1) to node (i).
By convention $D(1, h) = 0$ for all h .
- d_{ij} the length of the link connecting node (i) to node (j).
By convention $d_{ij} = \infty$ if nodes (i) is not connected to node (j).

5 Initially $D(i, 0) = \infty$ for all $i \neq 1$

For each successive $0 \leq h$,

$$D(i, h + 1) = \min_j [D(j, h) + d_{ji}], j = 1, \dots, N \text{ for all } i \neq 1$$

10 A path can contain at most $N-1$ links. In the worst case, the algorithm must be iterated $N-1$ times, each iteration must be done for $N-1$ nodes, and, for each node, the minimization must be taken over no more than $N-1$ alternatives. Thus the amount of computation grows at worst as N^3 .

Let $D(i)$ be the shortest path length from node (1) to (i), with $D(1) = 0$, then the equation converges with $h = N-1$ and can be written :

15
$$D(i) = \min_j [D(j) + d_{ji}], \text{ for all } i \neq 1$$

$$D(1) = 0$$

20 This is called **Bellman's equation** and expresses that the shortest path length from node (1) to (i) is the sum of the path length to the node before (i) (on the shortest path) plus the distance on the final link of the path.

Modified Bellman-Ford Algorithm

25 As described with the Bellman-Ford algorithm, one of the major criterion for selecting paths between nodes in packet networks is the minimum path length. The path length depends of the customer criterions. In most of the cases, the length is a function of the overall transmission delay imposed by the path between the two end nodes. In most high speed networks, the delay (path length) is not a major consideration since the worst-case delay through such networks is nearly always acceptable. The hop count, however, is a
30 direct measure of the amount of resources required to implement a given path and hence is of considerable importance in selecting paths. The hop count is defined as the number of links used to construct the path between two nodes. A selected path need not be a minimum hop count path since congestion on the network links may force the choice of a larger hop count path. However, such longer alternate paths cannot be allowed to grow without limit since inordinate amounts of network resources might be committed to one
35 path, resulting in further congestion for other paths and forcing yet longer hop count paths to be selected for yet other connections. The long term network throughput could thereby be adversely affected. The problem, then, is to select a path between an origin node and a destination node which has a minimum hop count, a minimum path length, which does not utilize an inordinate amount of network resources.

40 The goal of the Modified Bellman-Ford algorithm is to find a path, between a given source and destination node pair, with a **minimum number of links** connecting the source and the destination node and with a minimum path length. The algorithm starts from the source node and progresses by increasing the hop count (the number of links) until it finds a **feasible** path. At each hop count h , the algorithm finds the smallest path length from the source node to each intermediate node with exactly h links.

Let $D(i, h)$ the smallest path length from the source node to the node (i) with exactly h hops :

45
$$D(i, h) = \min_j [D(j, h - 1) + d_{ji}], j = 1, \dots, N \text{ for all } i \neq 1$$

where, by convention $d_{ji} = \infty$ if link (ji) does not exists (which include the case $i=j$).

50 Let s , the source node and d , the destination node, the algorithm stops at hop count h^* , $D(d, h^*)$ being the smallest path length among all the minimum hop feasible paths.

The difference between the Bellman-Ford and the Modified Bellman-Ford algorithms is that in the Bellman-Ford keeps going until it finds a path with the smallest path length (It stops when the smallest path length to each intermediate node cannot be further reduced or when all hop counts have been tried).

55 European Patent Application 93480030.1

European Patent Application **93480030.1** entitled - **Methods and Apparatus for Optimum Path Selection in Packet Transmission Networks** discloses a method to select optimum paths between origin

and destination nodes by means of a improvement of the Modified Bellman-Ford algorithm. The method defines "principal paths" between any given origin-destination pair. A principal path is defined as a feasible minimum-hop count path and principal links are defined as links in a principal path. All other links are defined as secondary links. Secondary paths are paths including at least one secondary link and including more than the minimum-hop count.

- A principal path is accepted as a route if none of its principal links is saturated, that means exceeds its preassigned traffic load.
- A secondary path, however, is accepted as a route only if none of its principal links, if any, is saturated and if the load levels on its secondary links are below a preselected threshold (typically lower than that for links designated as principal). If this load threshold is exceeded on any of the secondary links, the secondary path is rejected as a route.

One advantage of the path selection technique of this invention is that a maximum path length constraint can be imposed on the path selection process. That is, feasible paths can be tested to determine if the path length constraint has been exceeded and rejected if the constraint is exceeded. Such constraints can be used to prohibit inordinate resource consumption in implementing a route and can also be used to impose specific grade of service requirements such as avoidance of low speed links. For this reason, the path length constraints must typically be specified for each connection request, and the principal links determined separately for each connection request.

The algorithm is invoked with some of the following parameters :

- the source node address,
- the destination node address,
- the quality of service required for the connection. For example :
 - maximum call set up delay (very important parameter for connections serviced in real time).
 - maximum end to end transit delay,
 - maximum information loss, error probability,
 - ...

The algorithm uses in the source node (or access node) a local copy of the network topology to determine the minimum hop and path length to the destination node.

The route selection technique of European Patent Application 93480030.1 involves two phases. In the first phase, the principal links are identified for the requested connection. If no maximum length constraint is imposed, the principal links between any two nodes of the network can be precomputed and stored for use in the second phase of the algorithm. If a maximum length constraint is imposed, the principal links must be calculated for each new connection request, comparing each link length with the constraint, or the constraint decreased by the previously accepted principal link lengths.

This route determination technique has the advantages of producing optimum paths between arbitrary nodes of a packet switching system, taking into account not only the hop count and the path length, but also imposing a maximum ceiling on the path length.

But the problem is to compute the paths sufficiently rapidly so that an optimum route can be selected for each connection request.

Summary of the invention

In accordance with the illustrative embodiment of the present invention, optimum routing paths between origin and destination nodes in a packet network are selected more efficiently by reducing the total number of links potentially explored by the Modified Bellman-Ford Algorithm described in the European Patent Application 93480030.1. The path selection technique of the present invention involves two phases, the first phase for principal links identification, and the second phase for selection of the best point-to-point path in the network.

More particularly, the algorithm of the present invention limits the screening of the network links in the second phase to the principal links and excludes the secondary links. The exploration of a much smaller number of links has the advantage to considerably reduce the computation time required for the path selection. The fact the number of principal links is generally small compared with the total number of links potentially explored, allows to limit the additional processing time necessary in case of unsuccessful attempt.

In summary, the present invention discloses a system and a method for determining an optimal routing path between an originating and a destination node in a network. Said method involves the steps of :

- storing and updating the network configuration,
- in a first phase :

- identifying principal paths including minimal hop count and minimal transmission delay between said originating node and said destination node in said network,
 - identifying principal and secondary links,
 - determining, in a second phase and in response to said step of identifying principal paths and links, an optimal path between said originating and destination nodes,
- 5 and is characterized in that it further comprises the steps of :
- determining, in said second phase, an optimal path using only principal links,
 - determining, when the destination node is not reached using said principal links, an optimal path using principal and secondary links.
- 10 Said step of determining an optimal path on principal and secondary links, is using link utilization data previously computed on principal links by said step of determining an optimal path on said principal links.

Description of the drawings

- 15 Figure 1 shows the processing times (or number of instructions per second) required in function of the different line throughputs supported by the high speed networks.
- Figure 2 shows a typical model of high speed packet switching network including the access and transit nodes claimed in the present invention.
- Figure 3 describes a high speed Routing Point according to the present invention.
- 20 Figure 4 shows a portion of the Topology Database in each Routing Point.
- Figure 5 shows a general flow chart of the path determination procedure according to the present invention.
- Figure 6 shows a detailed flow chart of the accelerated option of Phase 2 according to the present invention.
- 25 Figure 7 shows a detailed flow chart of the conventional option of Phase 2 according to the present invention.
- Figure 8 shows a more detailed flow chart of Routine A1 of the Phase 2 accelerated search algorithm according to the present invention.
- Figure 9 shows a more detailed flow chart of Routine A2 of the Phase 2 conventional search algorithm
- 30 according to the present invention.
- Figure 10 shows an example of high speed network.
- Figure 11 illustrates the exploration of the network links for a path search between Los Angeles and Milano in an accelerated path search according to the present invention.
- Figure 12 illustrates the exploration of the network links for a path search between Los Angeles and
- 35 Milano in a conventional path search according to the present invention.

Description of the preferred embodiment of the invention

- As illustrated in Figure 2, a typical model of communication system is made of several user networks
- 40 (212) communicating through a high performance network (200) using private lines, carrier provided services, or public data networks. Each user network can be described as a set of communication processors and links (211) interconnecting large computers used as enterprise servers (213), user groups using workstations or personnel computers attached on LAN (Local Area Networks 214), applications servers (215), PBX (Private Branch eXchange 216) or video servers (217). These user networks, dispersed
- 45 in different establishments, need to be interconnected through wide area transport facilities and different approaches can be used for organizing the data transfer. Some architectures involve the checking for data integrity at each network node, thus slowing down the transmission. Others are essentially looking for a high speed data transfer and to that end the transmission, routing and switching techniques within the nodes are optimized to process the flowing packets towards their final destination at the highest possible rate. The
- 50 present invention belongs essentially to the latter category and more particularly to the fast packet switching network architecture detailed in the following paragraphs.

High speed packet switching networks

- 55 The general view in Figure 2 shows a fast packet switching transmission system comprising eight nodes (201 to 208) each node being interconnected by means of high speed communication lines called Trunks (209). The access (210) to the high speed network by the users is realized through Access Nodes (202 to 205) located at the periphery. These Access Nodes comprise one or more Ports, each one

providing an access point for attaching external devices supporting standard interfaces to the network and performing the conversions required to transport the users data flow across the network from and to other external devices. As example, the Access Node 202 interfaces respectively a Private Branch eXchange (PBX), an application server and a hub through three Ports and communicates through the network by means of the adjacent Transit Nodes 201, 208 and 205.

Switching Nodes

Each network node (201 to 208) includes a Routing Point where the incoming data packets are selectively routed on the outgoing Trunks towards the neighboring Transit Nodes. Such routing decisions are made according to the information contained in the header of the data packets. In addition to the basic packet routing function, the network nodes also provide ancillary services such as :

- the determination of routing paths for packets originated in the node,
- directory services like retrieving and updating information about network users and resources,
- the maintaining of a consistent view of the physical network topology, including link utilization information, and
- the reservation of resources at access points of the network.

Each Port is connected to a plurality of user processing equipments, each user equipment comprising either a source of digital data to be transmitted to another user system, or a data sink for consuming digital data received from another user system, or, typically, both. The interpretation of the users protocols, the translation of the users data into packets formatted appropriately for their transmission on the packet network (200) and the generation of a header to route these packets are executed by an Access Agent running in the Port. This header is made of Control and Routing Fields.

- The Routing Fields contain all the information necessary to route the packet through the network (200) to the destination node to which it is addressed.
- The Control Fields include, among other things, an encoded identification of the protocol to be used in interpreting the Routing Field (Source Routing, Label Swapping,).

Routing Points

Figure 3 shows a general block diagram of a typical Routing Point (300) such as it can be found in the network nodes (201 to 208) illustrated in Figure 2. A Routing Point comprises a high speed packet Switch (302) onto which packets arriving at the Routing Point are entered. Such packets are received :

- from other nodes over high speed transmission links (303) via Trunk Adapters (304).
- from users via application adapters called Ports (301).

Using information in the packet header, the adapters (304, 301) determine which packets are to be routed by means of the Switch (302) towards a local user network (307) or towards a transmission link (303) leaving the node. The adapters (301 and 304) include queuing circuits for queuing packets prior to or subsequent to their launch on the Switch (302).

The Route Controller (305) calculates the optimum routes through the network (200) so as to satisfy a given set of quality of service specified by the user and to minimize the amount of network resources used to complete the communication path. Then, it builds the header of the packets generated in the Routing Point. The optimization criterion includes the number of intermediate nodes, the characteristics of the connection request, the capabilities and the utilization of the Trunks in the path ... All the information necessary for the routing, about the nodes and transmission links connected to the nodes, are contained in a Network Topology Database (306). Under steady state conditions, every Routing Point has the same view of the network. The network topology information is updated when new links are activated, new nodes added to the network, when links or nodes are dropped or when link loads change significantly. Such information is originated at the network node to which the resources are attached and is exchanged by means of control messages with all other Route Controllers to provide the up-to-date topological information needed for route calculation (such database updates are carried on packets very similar to the data packets exchanged between end users of the network). The fact that the network topology is kept current in every node through continuous updates allows dynamic network reconfigurations without disrupting end users logical connections (sessions).

The incoming transmission links to the packet Routing Point may comprise links from external devices in the local user networks (210) or links (Trunks) from adjacent network nodes (209). In any case, the Routing Point operates in the same manner to receive each data packet and forward it on to another Routing Point as dictated by the information in the packet header. The fast packet switching network

operates to enable a communication between any two end user applications without dedicating any transmission or node facilities to that communication path except for the duration of a single packet. In this way, the utilization of the communication facilities of the packet network is optimized to carry significantly more traffic than would be possible with dedicated transmission links for each communication path.

5

Link Characteristics

Topology Database

Figure 4 shows, in tabular form, a portion of the information stored in the Topology Database 306. The different characteristics of each link in the network are listed in the database. For the present invention, only a few of these characteristics will be discussed.

Load Threshold

15

As might be expected, one of the critical characteristics of the transmission links is the Load Threshold available. Moreover, it is well known that such transmission facilities can only be loaded up to a fraction of their theoretical maximum load (bandwidth) if reasonable transmission properties have to be maintained. The Load Threshold of such a transmission facility can be represented by the quantity C_{kl} (the effective load capability of the transmission link between nodes (k) and (l)). Two different Load Thresholds, $L(P)$ and $L(S)$, are defined for each transmission links, depending on whether the link is selected as a principal link in a route or as a secondary link in the route.

20

Principal and Secondary links

25

A **principal link** is defined as a leg of a principal path where a principal path is a feasible minimum hop count path between the originating node and the destination node. The hop count h is simply the number of transmission links in the path. All other links are defined to be **secondary links**. Any non-minimum hop count path between the originating node and the destination node is called a secondary path and it always includes at least one secondary link.

30

A principal path is preferred over a secondary path in determining optimum routes between nodes. The computation time necessary is also significantly shorter for a principal path than for a secondary path.

If, however, a principal path is not available due to its already being fully loaded, a secondary path can be chosen. In order to discriminate against such a secondary path, a Load Threshold $C_{kl,S}$ is defined for each secondary link which is less than the corresponding principal Load Threshold $C_{kl,P}$ for that same link ($C_{kl,P} \geq C_{kl,S}$). That is the reason why the table of Figure 4 includes two different Load Thresholds for each transmission link, one to be used if the link is a principal link in a route being calculated and the other to be used in the link if a secondary link in the route being calculated.

35

Total Allocated Load

40

The table includes the Total Allocated Load, $T(AL)$, for each link. The value \hat{C}_{kl} represents the total load (or bandwidth) which has already been allocated for the transmission link kl (transmission link between nodes (k) and (l)) due to previously calculated routes. If the difference between this already allocated load \hat{C}_{kl} and the total available principal or secondary load of the channel C_{kl} ($C_{kl,P}$ or $C_{kl,S}$ depending on the whether the link is a principal link or a secondary link) is not sufficient to carry the new connection, then the link cannot be selected.

45

As described in European Patent Application 93480030.1 the present invention uses also a maximum delay defined as P_T and optionally some "Quality of Service" parameters (QOS). Such QOS parameters may include, for example, a particular security level, a packet size or a minimum probability of overflow ...

50

Route Determination

Route request

55

Each request for a route determination includes the following input parameters:

- Source Node (i)
- Destination Node (j)

- Required Bandwidth (c)
- Maximum Path Length Threshold (P_T)
- Quality of Service Parameters (QOS) (Optional)

The requested maximum path transmission delay is generally taken as Path Length Threshold (P_T). Using these parameters, a path is determined by first searching through all links to determine minimum hop count path that satisfy the maximum path length constraint P_T and then backtracking to derive a list of principal links. This search is supplemented by accumulating the link delays d_{kl} for each path. Once the destination node is reached, minimum hop count principal paths are backtracked to create a list of principal links. This principal link list is used in the second phase of the algorithm to determine the optimum path from the source to the destination node. This specific procedure for determining paths through a packet communications system will be described with reference to Figures 5, 6, 7, 8 and 9.

Path Determination Procedure

Figure 5 shows a general flow chart of the path determination procedure according to the present invention.

1. Data Input (501)

Starting at 500, step 501 first specifies the inputs required to calculate an optimum route. As noted above, these input parameters include the originating node (i), the destination node (j), the requested connection bandwidth (c) and the maximum Path Length Threshold P_T (and optionally a group of Quality Of Service (QOS) parameters).

2. Phase 0 (502) : Bandwidth Requirements

The list of links in the network is pruned by removing all links which do not meet the required bandwidth c ($c \geq C_{kl}$) and the Quality Of Service (QOS) parameters.

3. Phase 1 (503) : Principal and Secondary Links Search

With this decimated list of transmission links, the function of Phase 1 (503) is to identify the principal links. In determining the lengths of the transmission links Σd_{kl} , the process assumes that the utilization of each link is zero

$$(\hat{C}_{kl} = 0),$$

which means that the entire bandwidth of the link is available. The process used to search for principal paths is the Modified Bellman-Ford Algorithm described in Patent Application 93480030.1.

4. Phase 2 (504) : Optimum Path Computation

Once the principal paths have been identified (503), the function of Phase 2 (504) is to identify the optimum path, using the principal paths from Phase 1 (503), and the current utilization data (allocated bandwidth \hat{C}_{kl}). It exists two different options for Phase 2, an **Accelerated Version** and a **Conventional Version** :

- The Conventional Version is similar to Phase 2 described in Patent Application 93480030.1,
- The Accelerated Version, object of the present invention, represents a significant improvement in the process of the path selection by limiting the screening of the network to the principal links. This version will be described in detail hereafter.

5. Acceptable Path Determination (505)

As noted in 505, the output of Phase 2 (504) is an acceptable minimum hop count path from the originating node (i) to the destination node (j) if it has the minimum possible hop count and if its path length is less than the input maximum of P_T ($\Sigma d_{kl} \leq P_T$). If no such path exists, a failure signal is returned. The process ends in 506.

Note : No detailed flow chart of Phase 1 is shown due to the fact that this phase is strictly identical to the one described in Figure 6 of Patent Application 93480030.1

Phase 2

1. Accelerated Version

Figure 6 shows a more detailed flow chart of the Accelerated Version of Phase 2 where the optimum path is computed. Starting in 600, Routine A1 (601), similar to Routine A in Phase 1, is executed. Routine A1 uses the same modified Bellman-Ford Algorithm to determine the feasibility and the link length for each possible link in the ultimate path. The main difference resides in the fact that **only**

principal links are considered in the links exploration part of the algorithm. Principal links are accepted as feasible only at the condition that the load capacity is available for the new connection, i.e.,

$$\hat{C}_{kl}^{(2)}$$

5

does not exceed the principal link load threshold $C_{kl,P}$. Secondary links are **not** considered. If the destination node is not reached at the end of Routine A1 the process switches to the conventional method detailed in Figure 7. If the destination node is reached (602), the list of feasible links are backtracked (603) through using the hop count and the path lengths to find the shortest principal path, all the principal paths having the same minimum hop count. The process of Figure 6 ends in 604.

10

2. Conventional Version

Figure 7 shows a more detailed flow chart of Phase 2 in which the optimum path is computed. The Phase 2, according to the present invention includes an Accelerated (701, 704) and a Conventional (703, 704) Version. The Conventional Version is the process used when Routine A1 of the accelerated option does not succeed in reaching the destination node of the desired path. Phase 2 starts in 700 with the accelerated version. If the destination node is not reached at the end of the Routine A1 (701) (decision point 702) after all principal links have been searched in order to find a feasible principal path, Routine A2 (703) is executed. Routine A2 operates according to the conventional method described in European Patent Application 93480030.1. It considers both principal and secondary links : secondary links are accepted as feasible provided that adding the new connection does not result in exceeding the secondary link load threshold $C_{kl,S}$. **However routine A2 benefits from all the checkings and computations related to**

20

25

$$\hat{C}_{kl}^{(2)}$$

30

previously done for the principal links by Routine A1 in 701. That is the reason why the chaining of the two Routines, A1 (701) and A2 (703), **does not sensibly degrade** the Phase 2 of the present invention compared with the Phase 2 described in European Patent Application 93480030.1. In step 704, the list of feasible links are backtracked through using the hop count and the path lengths to find the shortest path with the minimum hop count. The Phase 2 ends in 705

Note :

35

- The modified Bellman-Ford Algorithm used in Routine A of Phase 1, Routine A1 of the Accelerated Phase 2, and Routine A2 of the Conventional Phase 2 is the same as the one described in Figure 8 of European Patent Application 93480030.1.
- The Backtracking procedure used in Routine B of Phase 1 and Routine B of Accelerated and Conventional Phase 2 of the present invention is the same as the one described in Figure 9 of European Patent Application 93480030.1.

40

Search Algorithm

45

1. Accelerated Version (Routine A1)

Figure 8 shows a detailed flow chart of the Modified Bellman-Ford Algorithm used to perform the accelerated search for an optimum path. Starting at 800, step 801 first sets the next node to the origin node (i). In 802, the data for the next node is retrieved from the Topology Database (306). In 803, the data for the next link leaving that node is obtained from the same Topology Database (306). Decision point 804 determines whether that link is principal or not :

50

- If the link is principal, decision point 805 is entered :
 - The accumulated load

55

$$\hat{C}_{kl}^{(2)}$$

is computed in step 812. : li. Then,

$$: \hat{f} \cdot \hat{C}_{kl}^{(2)}$$

is compared to the link principal threshold $C_{kl,P}$:

- ▲ If the accumulated load is equal to or less than the principal threshold,

$$(\hat{C}_{kl}^{(2)} \leq C_{kl,P}),$$

the decision point 806 tests the accumulated path length or delay.

- ▲ If the accumulated load is greater than the principal threshold as determined by decision point 805

$$(\hat{C}_{kl}^{(2)} \geq C_{kl,P}),$$

the next link is obtained in 808.

- If it is determined in decision point 804 that the link is not a principal link, the link is not considered and the next link is obtained in 808.

In decision point 806, the accumulated path length up to this point Σd_{kl} is compared to the maximum path length P_T :

- If the accumulated path length Σd_{kl} is less than P_T , the hop count h_k and the accumulated path length d_{kl} are saved in a list (807), the node reached is also saved in order to proceed with the iteration at the next hop if necessary.
- If the accumulated path length Σd_{kl} is equal to or greater than P_T , step 807 is bypassed and the data for this link is not added to the list.

In either case, decision point 808 is then entered to determine if there are any more links exiting from this node. If so, step 803 is activated to get the next link and continue the process. If there are no more links exiting from this node, decision point 809 determines if the node is the destination node (j). If so, the process is complete and terminates in 811. If this node is not the destination node (j), decision box 810 determines if there are any more nodes to be screened. If so, step 802 gets the next node and continue the process. If there are no more nodes to be screened, then the accelerated search has failed and the conventional search described in Figure 9 is started in 900.

When the procedure of Figure 8 is complete, and destination node (j) has been reached, a list of the minimum hop counts h_k and the path lengths d_{kl} is available. As discussed above, Routine B then backtracks through this list to identify the path with the minimum path delay as well as the minimum hop count. This is the optimum path to be used in sending the packets involved in the connection through the system of Figure 2.

Note: When the Modified Bellman-Ford Algorithm is used to identify the principal paths, the same flow chart as shown in Figure 10 of Patent Application 93480030.1 is used.

2. Conventional Version (Routine A2)

Figure 9 shows a detailed flow chart of the Modified Bellman-Ford Algorithm used to perform the conventional search for an optimum path. Starting in 900, step 901 first sets the next node to the origin node (i). In 902, the data for the next node is retrieved from the Topology Database (306). In 903, the data for the next link leaving that node is obtained from the same Topology Database. Decision point 904 determines whether that link is principal or not :

- If the link is principal, decision point 905 compares the accumulated load

$$\hat{C}_{kl}^{(2)}$$

with the link principal threshold $C_{kl,P}$ ***This accumulated load has been computed previously during the accelerated search algorithm and so can be reused here.***

- If the accumulated load is equal to or less than the principal threshold, decision point 907 tests the accumulated path delay.
- If the accumulated load is greater than the principal threshold, as determined by decision point 905, the next link is obtained in 909.

= > Pseudocode for principal link handling:

IF (k,l) \in PL / * $\hat{C}_k^{(2)}$ available from routine A1 */

$$\text{IF } \hat{C}_{kl}^{(2)} < C_{kl,p}$$

IF $\sum d_{kl} < P_T$

```
.... /* Continue phase A2 execution */
```

- If it is determined in decision point 904 that the link is a secondary link,
 - the accumulated load

$$\hat{C}_{kl}^{(2)}$$

is computed in step 913, and

- then, decision point 906 compares the accumulated load

 $\hat{C}_A^{(2)}$

to the link secondary threshold $C_{kl,S}$.

- ▲ If the accumulated load is equal to or less than the secondary threshold, decision point tests the accumulated path delay.
- ▲ If the accumulated load is greater than the secondary threshold, as determined by decision point 906, the next link is obtained in 909.

= > Pseudocode for secondary link handling:

IF $(k,l) \notin PL$ /* $\hat{C}_k^{(2)}$ must be computed */

• Compute $\hat{C}_{kl}^{(2)}$ / * Complex computation involving $\hat{C}_{kl}^{(1)}$ and c */

$$\text{IF } \hat{C}_{kl}^{(2)} < C_{kl,S}$$

IF $\sum d_{kl} < P_T$

```
.... /* Continue phase A2 execution */
```

In decision point 907, the accumulated path length up to this point is compared to the maximum path length P_T .

- If the accumulated path length is less than P_T , the hop count h_k and the accumulated path length d_{kl} are saved in a list in step 908.
- If the accumulated path length is equal to or greater than P_T , step 908 is bypassed and the data for this link is not added to the list.

5 In either case, decision point 909 is then entered to determine if there are any more links exiting from this node. If so, step 903 gets the next link and continues the process. If there are no more links exiting from this node, decision point 910 is entered to determine if the node is the destination node (j). If so, the process is complete and terminates in 912. If this node is not the destination node (j), decision point 911 then determines if there are any more nodes to be screened. If so, step 902 gets the next node and
10 continues the process. If there are no more nodes to be screened, then no path is feasible, the process terminates in 912.

When the procedure of Figure 9 is complete, a list of the minimum hop counts h_k and the path lengths d_{kl} is available. As discussed above, Routine B then backtracks through this list to identify the path with the minimum path delay as well as the minimum hop count. This is the optimum path to be used in sending the
15 packets involved in the connection through the system of Figure 2.

Example of implementation

Path Search in a Typical Network

20 Figure 10 shows a typical network used to illustrate the improvements provided by the present invention. It is a packet switched network comprising 33 nodes and 126 unidirectional high speed transmission links (63 trunks) of various capacity : T1 (1.5 Mbps), T3 (45 Mbps), E1 (2 Mbps), E3 (34 Mbps), OC3, STM1 (155 Mbps)... The average connectivity is two trunks per node with a minimum of one
25 (Oslo, Edinburgh, Dublin, San Jose, Boston, Warsaw) and a maximum of eleven (Paris). The object of the present invention is to reduce the number of links potentially explored in searching for the optimum path between a source and a destination node. In our example, the source is Los Angeles (USA) and the destination is Milano (Italy). The Phase 1 of the route determination procedure identifies four principal paths with a minimal hop count of three :

- Los Angeles - London - Zurich - Milano
- Los Angeles - London - Paris - Milano
- Los Angeles - Raleigh - Nice - Milano
- Los Angeles - New York - Paris - Milano

Once Phase 1 is successfully achieved, Phase 2 is executed to determine an optimum path :

• Accelerated Version

35 Figure 11 shows the number of links explored by the Modified Bellman-Ford Algorithm in Routine A1 object of the present invention. Only the principal links are considered to determine the path length and feasibility. In our example, the network is reduced to 10 links : Los Angeles - London, Los Angeles - Raleigh, Los Angeles - New York, Raleigh - Nice, Nice - Milano, London - Zurich, London -
40 Paris, Paris - Milano, Zurich - Milano, New York - Paris.

• Conventional Version

Figure 12 shows the number of links explored by the Modified Bellman-Ford Algorithm used in Routine A of the the conventional Phase 2 described in European Patent Application 93480030.1. The search is not only limited to principal links but includes also secondary links. For example, Moscow
45 can be reached in three hops. The secondary links New York - Berlin and Berlin - Moscow are visited by the algorithm in its search for the optimum path. In our case, 54 links have been explored which represents 80% of the network.

Performances

50 To quantify the improvement resulting from the the new Path Selection procedure compared with the original version, a simulation has been done to estimate the performances of the path selection code running under a AIX Risc System/6000 workstation (compiled with XLC). An AIX tool providing, in output, the list of all instructions executed during the program and their usage frequency has been used.

55 The simulated network is the one described in Figure 10. It comprises 33 nodes and 126 unidirectional links (63 trunks). Three tests have been run, first with the specifications detailed in European Patent Application 93480030.1 and secondly with the route determination procedure object of the present invention. The results of the computations are compared in the table hereunder : the gain of performance in

term of executed instructions is about 15%.

5

Test	hops	Visited links in Phase 1	Executed Instructions		
			Conventional	Accelerated	Gain
1	2	22	84.005	73.604	13%
2	3	54	189.331	156.955	17%
3	5	63	241.341	199.723	17%

10

The performance gain can reach 50 % and more especially for longer paths and also when processors with rather poor computation capability are used, for example processors without Floating-Point capability.

15 **Note :**

- These results take into account the two phases of the path selection procedure : Phase 1 remains unchanged and Phase 2 is updated in its new version according to the present invention.
- The second pass having more floating point calculation compared with the first one, the gain would be larger with a hardware platform devoid of Floating Point Unit. For example, with a 960CF Intel processor (no Floating Point Unit), the gain is estimated to 50% for a average 4 hops path.

20

Appendix

25 **Definitions**

- N is the total number of nodes in the network.
- h is the iteration index of the algorithm, equal to the hop count.
- h^* is the hop count of the minimum hop path from the source node to the destination node satisfying the path length constraint ($h^* = 0$ if the algorithm does not find a feasible path).
- h_k is the number of hops from the source node to node (k).
- P_T is the maximum Path Length Threshold between the origin (i) and the destination (j) nodes (maximum delay tolerated by the requesting connection).
- d_{kl} is the length (or delay) of the link (if any) between nodes (k) and (l). $d_{kl} = \infty$ if no link exists between node k and l, or if $k = l$.
- C_{kl} is the effective load (or bandwidth) capability of the link between node (k) and node (l) (Load Threshold)
 - $C_{kl,P}$ is the Load Threshold L(P) of the link (kl) as principal link in the route.
 - $C_{kl,S}$ is the Load Threshold L(S) of the link (kl) as secondary link in the route.
- \hat{C}_{kl} is the Total Allocated Load T(AL) for the link between nodes (k) and (l) (total load which has already been allocated for this link due to previously calculated routes).
- Current allocated load on link (kl) :

45

$$\hat{C}_{kl}^{(1)}$$

is the allocated load not taking the requesting connection into account.

50

$$\hat{C}_{kl}^{(2)}$$

is the allocated load after the requesting connection.

55

- $D(l,h)$ is the smallest path length (delay) from the source node to the node (l) with exactly h hops (= ∞ if no such path exists).

Claims

1. A network access node (300) in a packet switching communication network (200) comprising a plurality of nodes (201..208) interconnected with transmission links (209), said node including :
 - means for receiving and transmitting data packets (301, 302, 304),
 - means for storing and updating the network configuration (306),
 - means, in a first phase (503), for :
 - identifying principal paths including minimal hop count and minimal transmission delay Σd_{kl} between an originating node and a destination node in said network,
 - identifying principal and secondary links,
 - means, responsive to said means for identifying principal paths and links, for determining, in a second phase (504), an optimal path between said originating and destination nodes, and characterized in that said means for determining, in said second second phase (504), an optimal path comprises :
 - means for determining an optimal path using only principal links (701, 704).
2. A network access node (300) according to claim 1 wherein said means for determining, in said second phase, an optimal path comprises a further means for determining an optimal path using principal and secondary links (703, 704) when the destination node is not reached (702) using only said principal links.
3. A network access node (300) according to claim 2 wherein :
 - said means for determining an optimal path on principal and secondary links, is using link utilization data previously computed on principal links by said means for determining an optimal path on said principal links.
4. A network access node (300) according to anyone of claims 1 to 3 comprising means for limiting the transmission delay in said optimal path to a preselected threshold $P_T(505)$.
5. A network access node (300) according to anyone of claims 1 to 4 wherein said means for determining an optimal path between said originating and destination nodes comprises a Modified Bellman-Ford algorithm (701, 703).
6. A method in an access node (300) for determining an optimal routing path between an originating node and a destination node in a packet switching communication network (200) comprising a plurality of nodes (201..208) interconnected with transmission links (209), said method involving the steps of :
 - storing and updating the network configuration (306),
 - in a first phase (503) :
 - identifying principal paths including minimal hop count and minimal transmission delay Σd_{kl} between said originating node and said destination node in said network,
 - identifying principal and secondary links,
 - determining, in a second phase (504) and in response to said step of identifying principal paths and links, an optimal path between said originating and destination nodes, and characterized in that said second phase (504) for determining an optimal path comprises the step of :
 - determining an optimal path using only principal links (701, 704), and
7. The method according to claim 6 wherein said second phase (504) for determining an optimal path comprises the further step of :
 - determining, when the destination node is not reached (702) using only said principal links, an optimal path using principal and secondary links (703, 704).
8. The method according to claim 7 wherein
 - said step of determining an optimal path on principal and secondary links, is using link utilization data previously computed on principal links by said step of determining an optimal path, on said principal links.

9. A method according to anyone of claims 6 to 8 comprising :
the step of limiting the transmission delay in said optimal path to a preselected threshold P_T (505).

10. A method according to anyone of claims 6 to 9 wherein
5 said step of determining an optimal path between said originating and destination nodes comprise
 a Modified Bellman-Ford algorithm.

10

15

20

25

30

35

40

45

50

55

PROCESSING TIME IN TRANSIT NODES

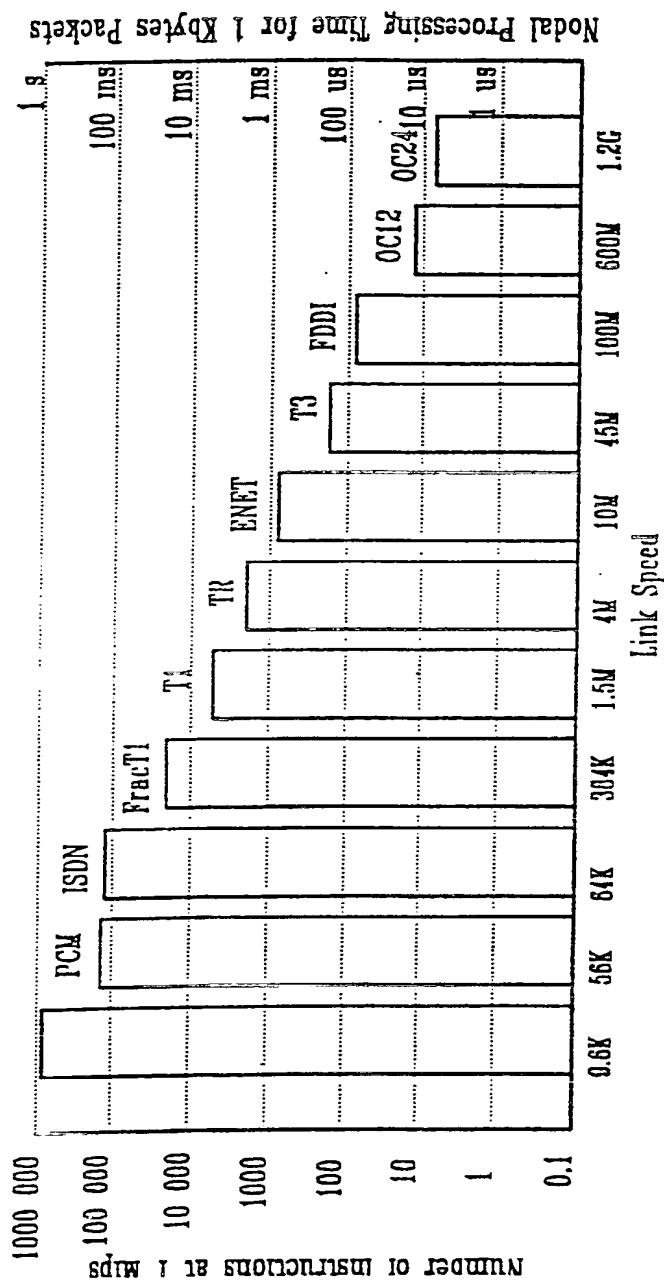


FIGURE 1

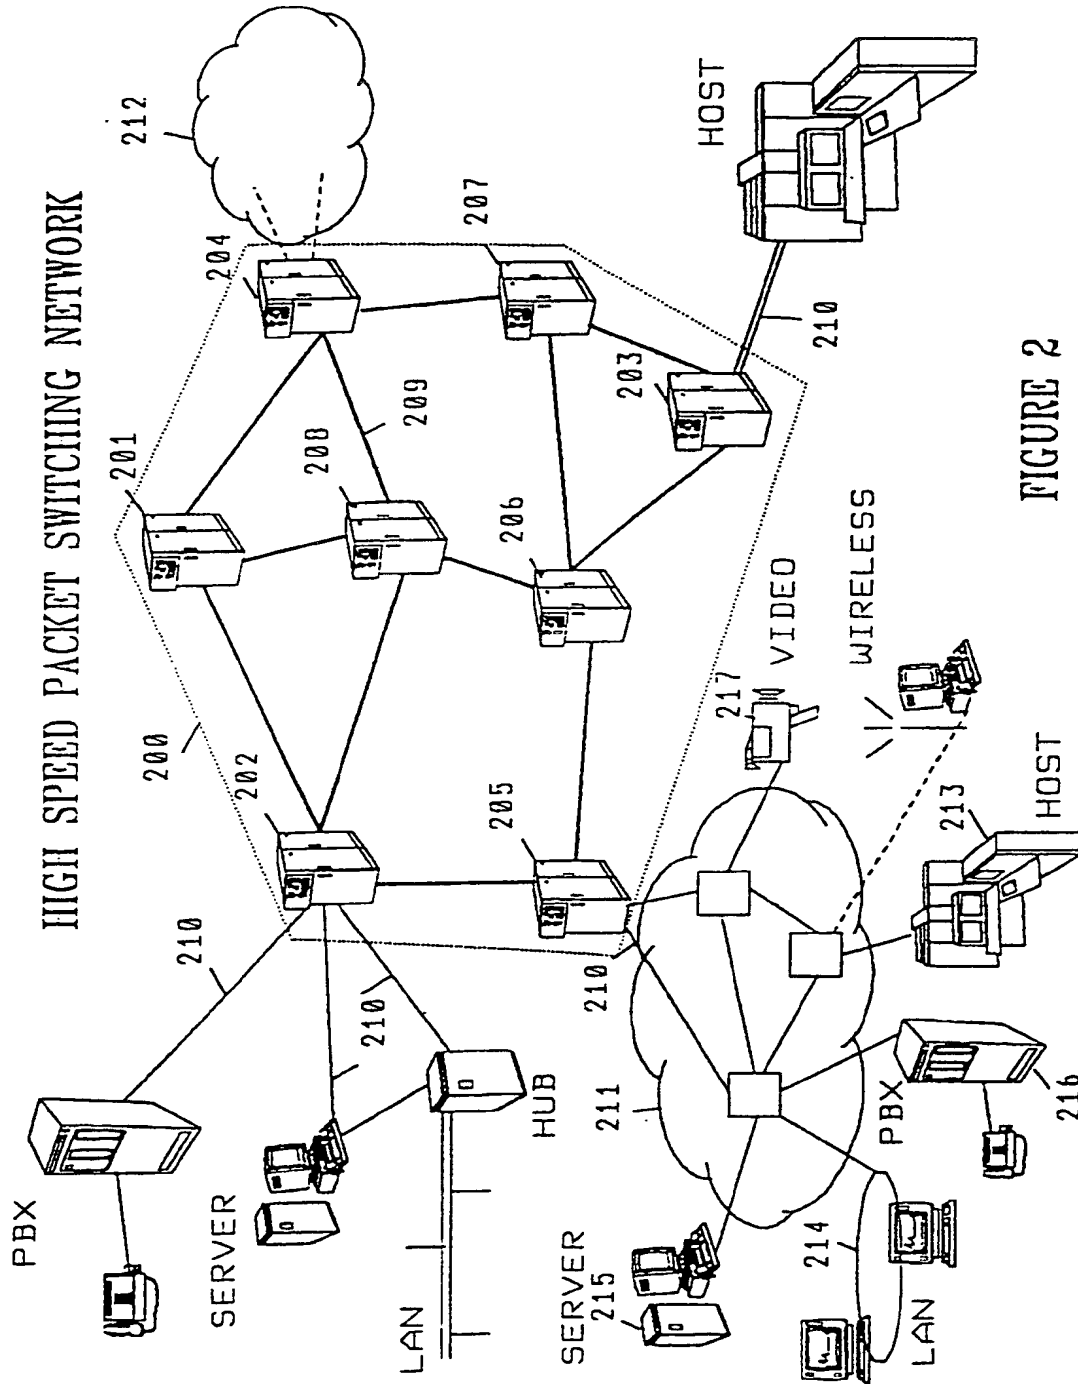


FIGURE 2

HIGH SPEED PACKET SWITCHING NODE

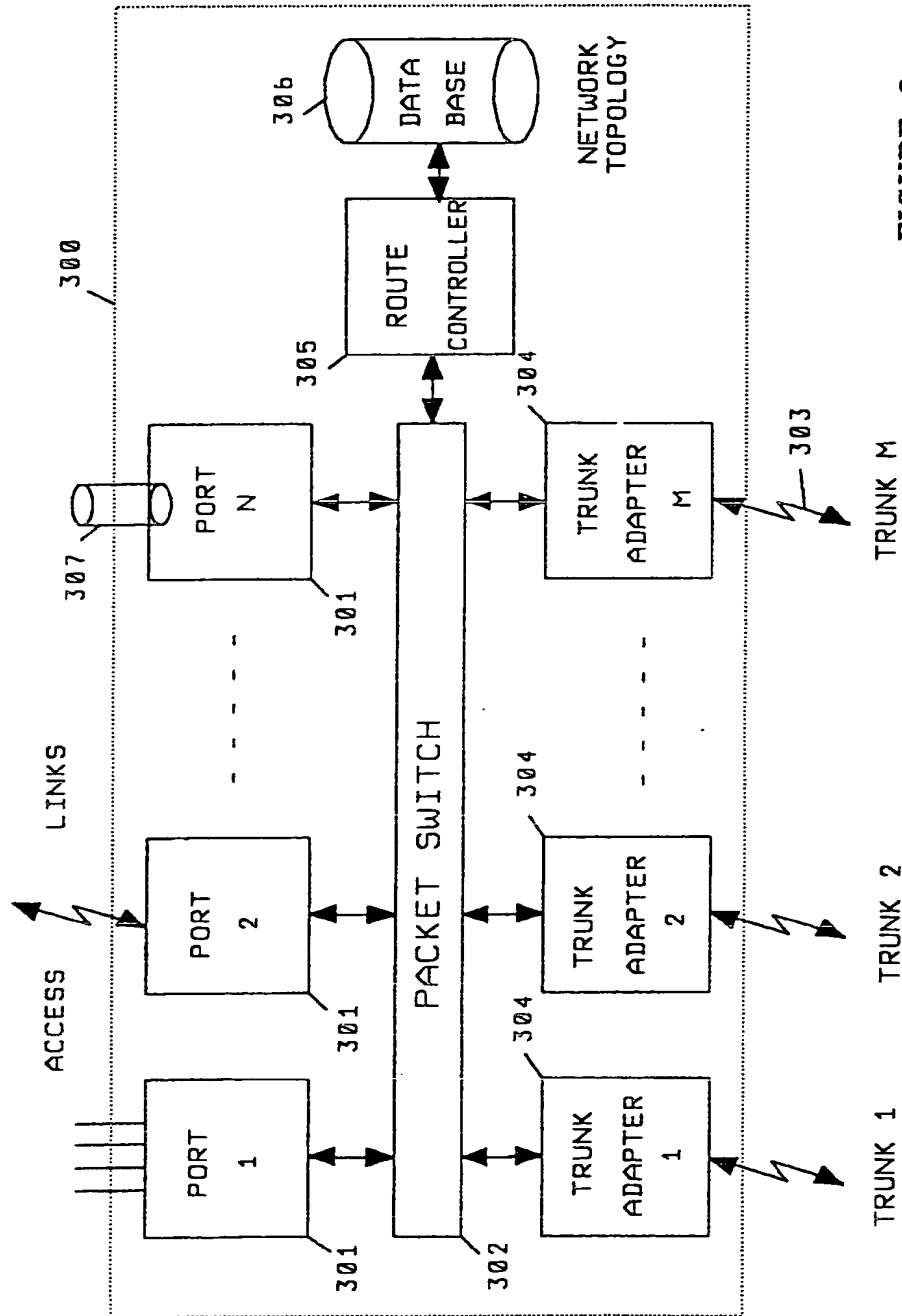


FIGURE 3

CHARACTERISTIC		LINK VALUES			
NAME	DESCRIPTION	A	B	...	N
L(P)	Load Threshold if Principal Link	$C_{A,P}$	$C_{B,P}$...	$C_{N,P}$
L(S)	Load Threshold if Secondary Link	$C_{A,S}$	$C_{B,S}$...	$C_{N,S}$
T(AL)	Total Allocated Load	\hat{C}_A	\hat{C}_B	...	\hat{C}_N
QOS	Quality of Service Parameters	QOS_A	QOS_B	...	QOS_N

FIGURE 4

TOPOLOGY DATABASE
Link Characteristics Data

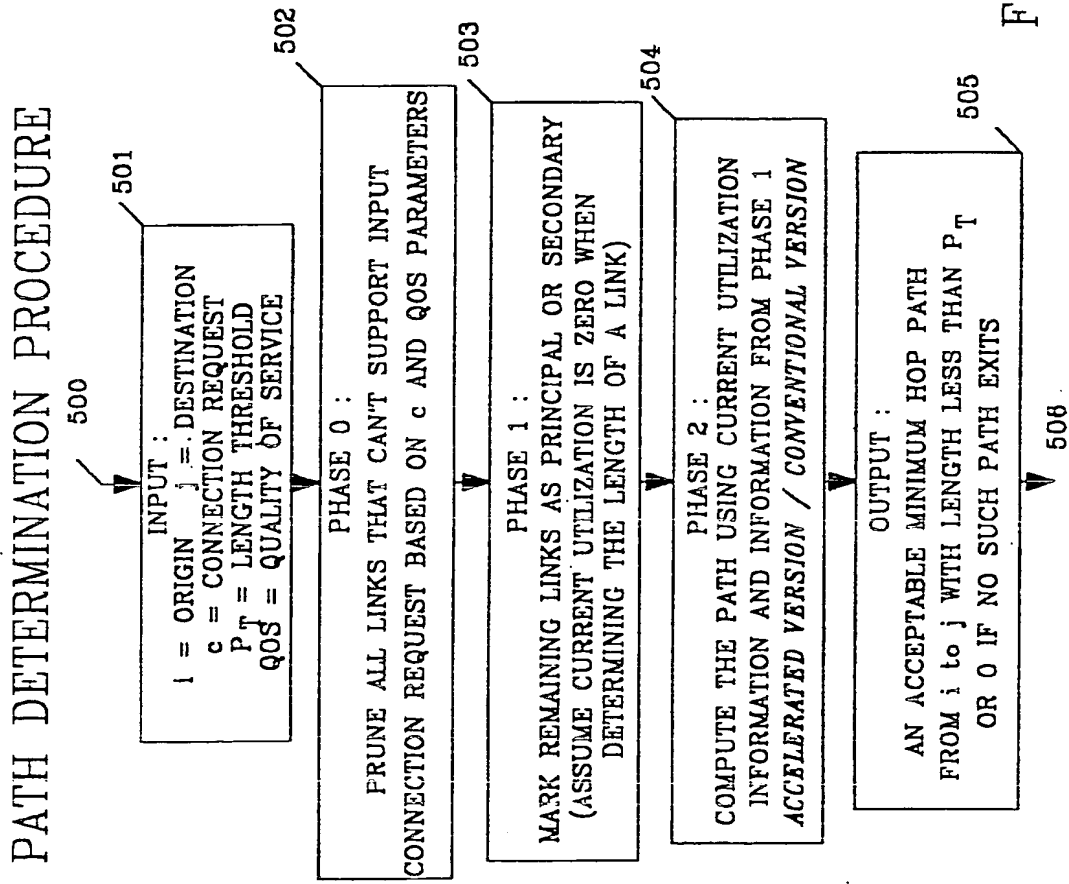


FIGURE 5

PHASE 2 : ACCELERATED VERSION
DETERMINE OPTIMUM PATH

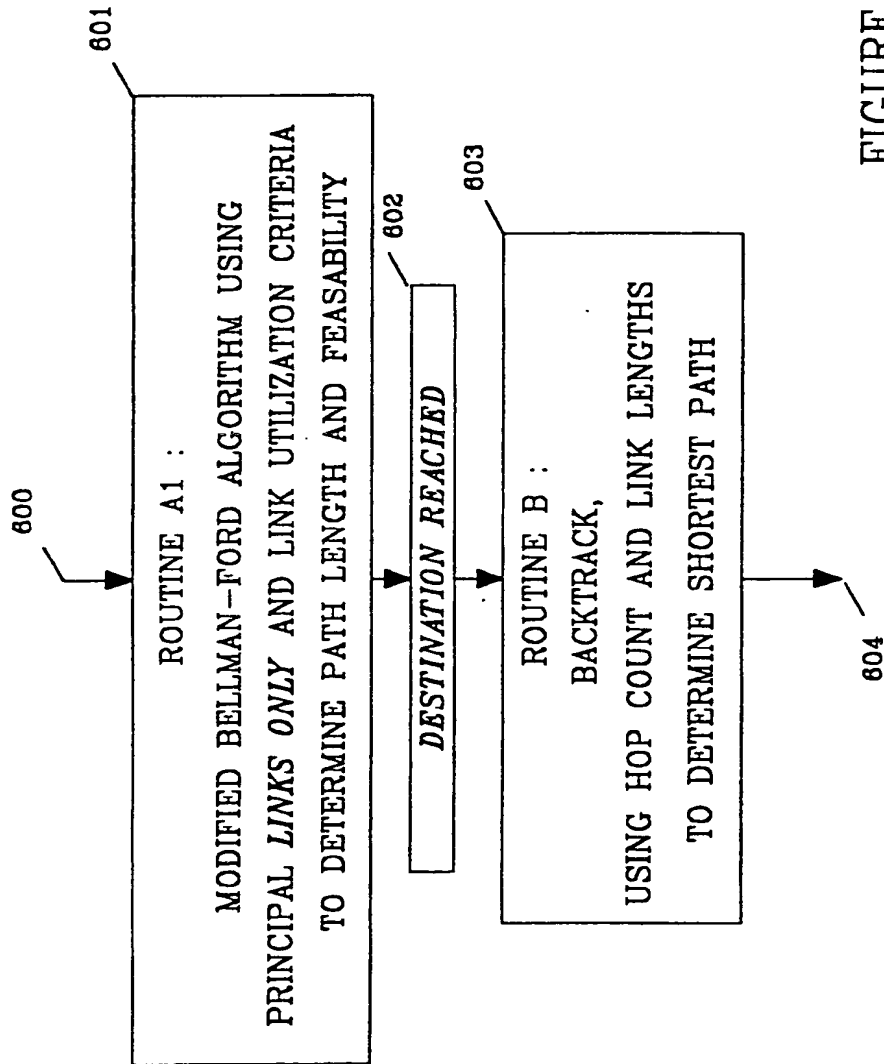


FIGURE 6

PHASE 2 : CONVENTIONAL AND ACCELERATED VERSIONS DETERMINE OPTIMUM PATH

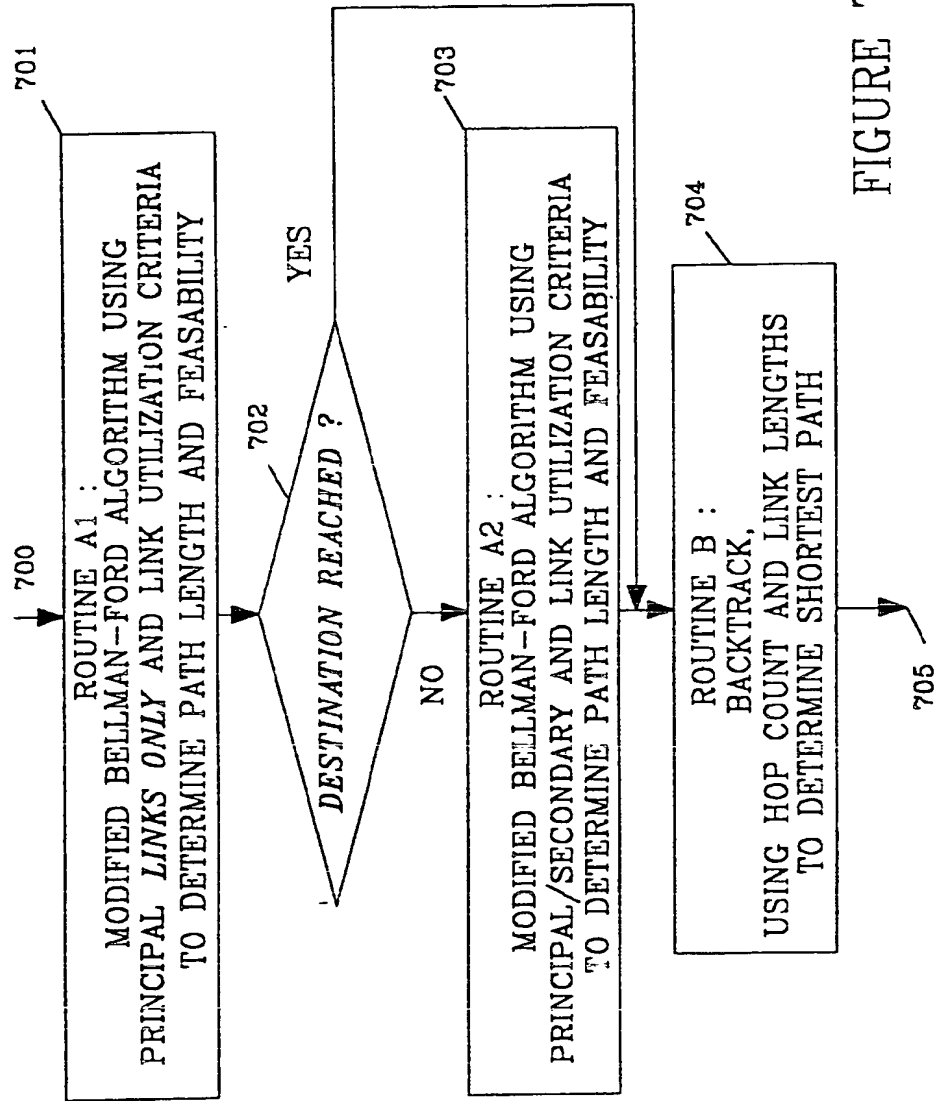


FIGURE 7

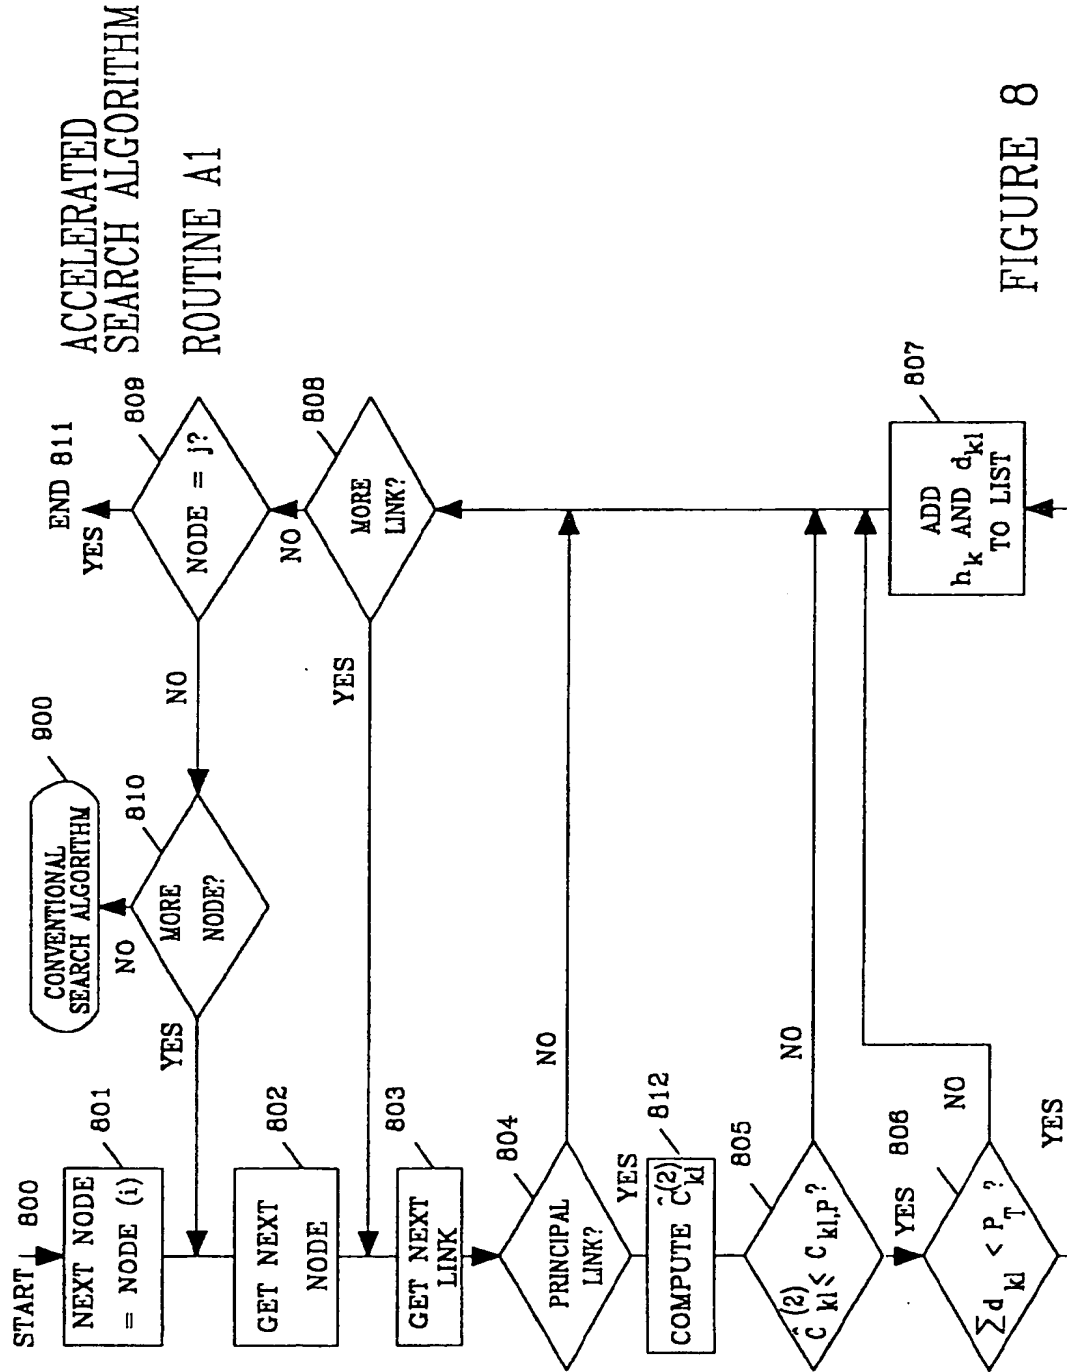


FIGURE 8


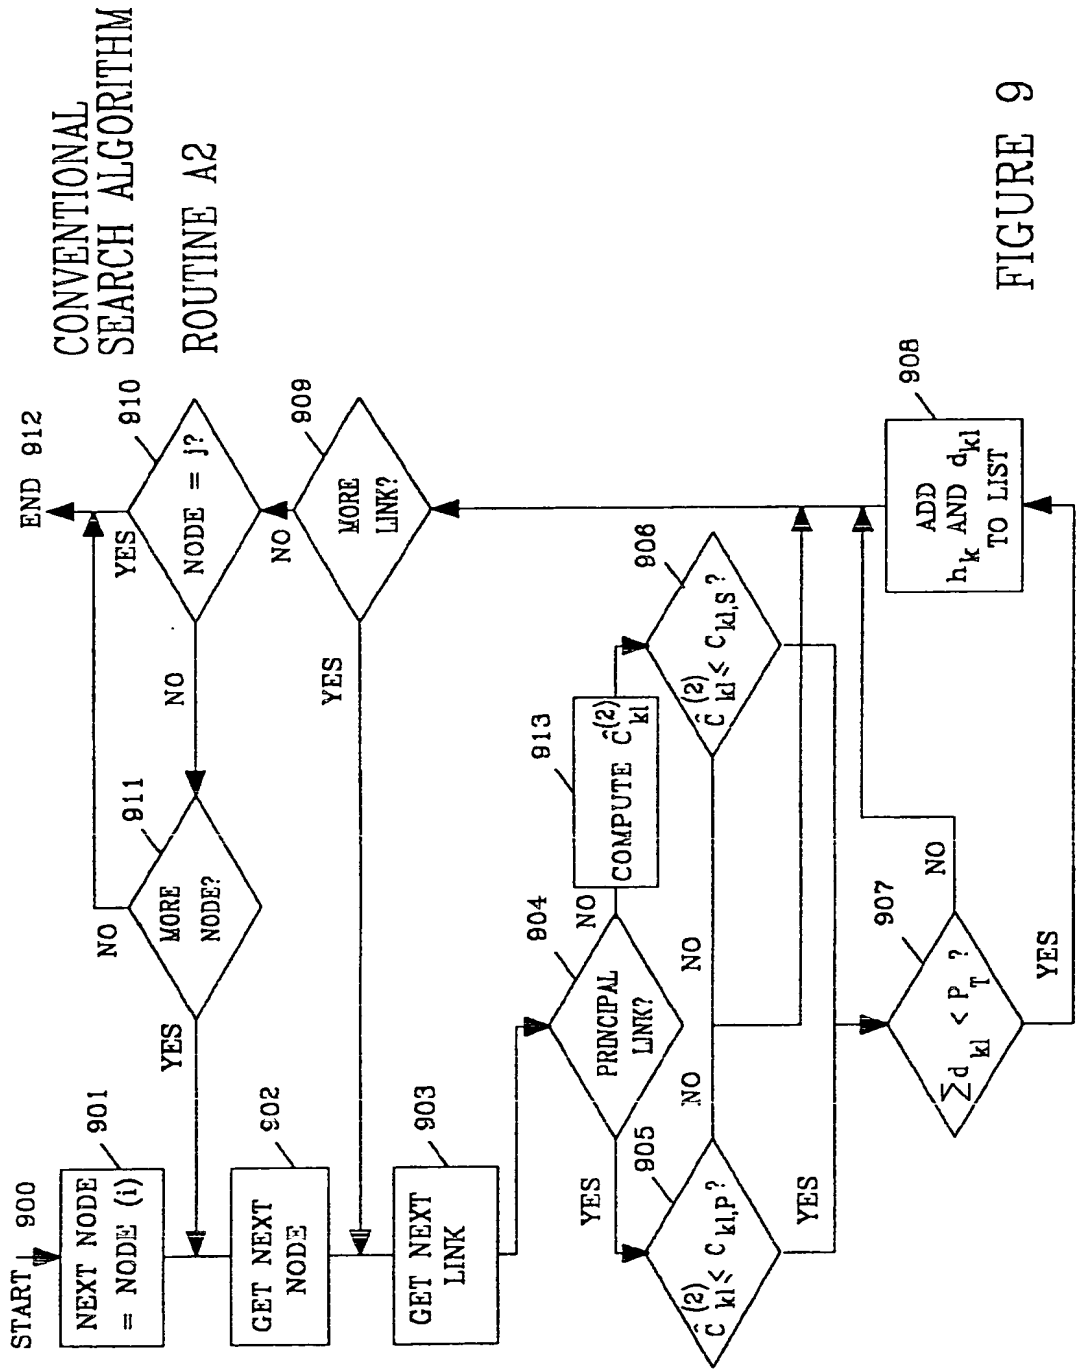


FIGURE 9


HIGH SPEED COMMUNICATION NETWORK

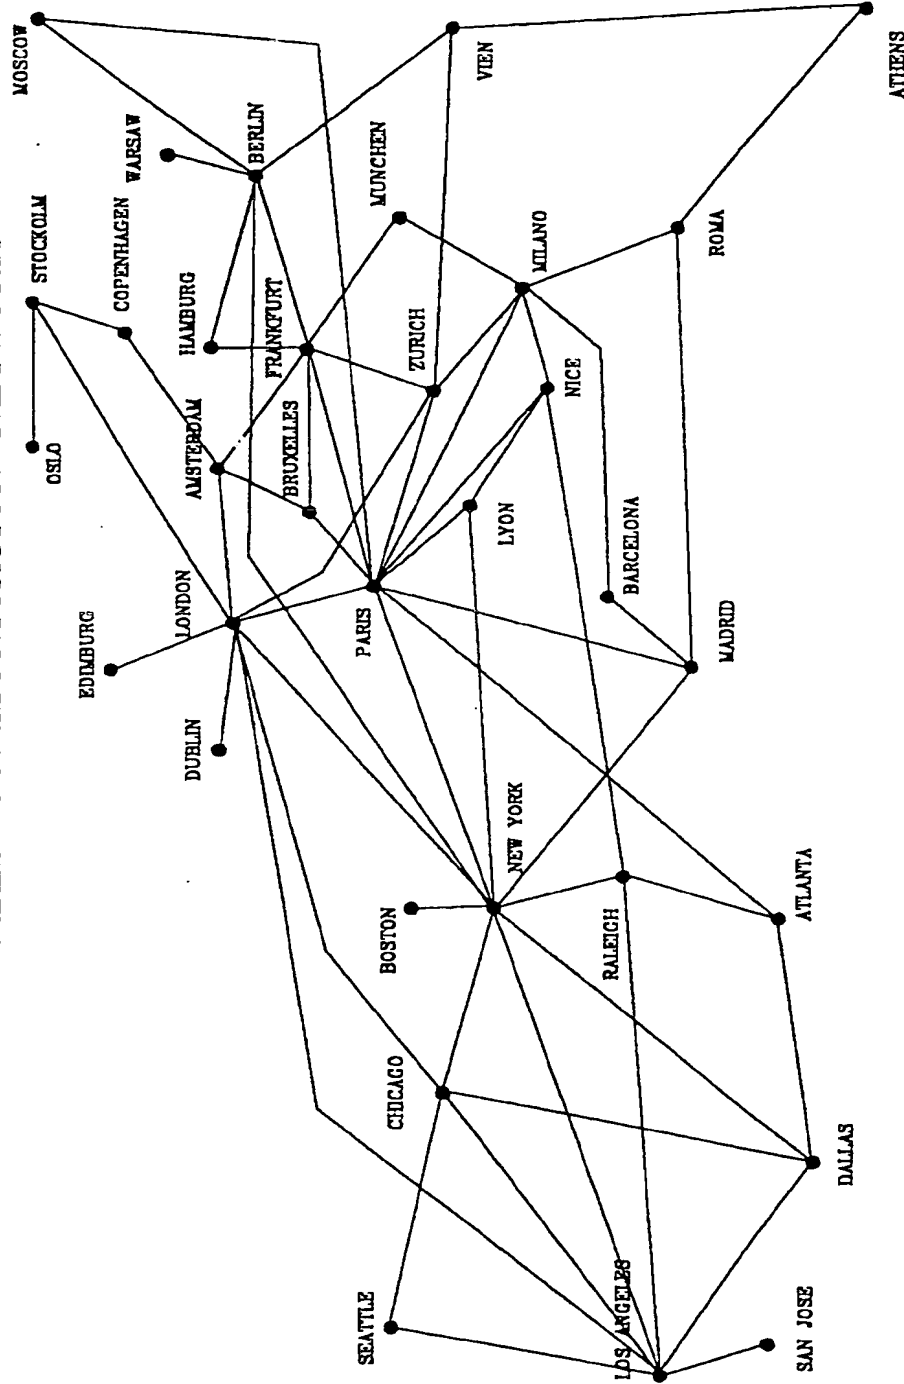

TOTAL NUMBER OF LINKS : 63

FIGURE 10


PATH SEARCH BETWEEN LOS ANGELES AND MILANO ACCELERATED ALGORITHM

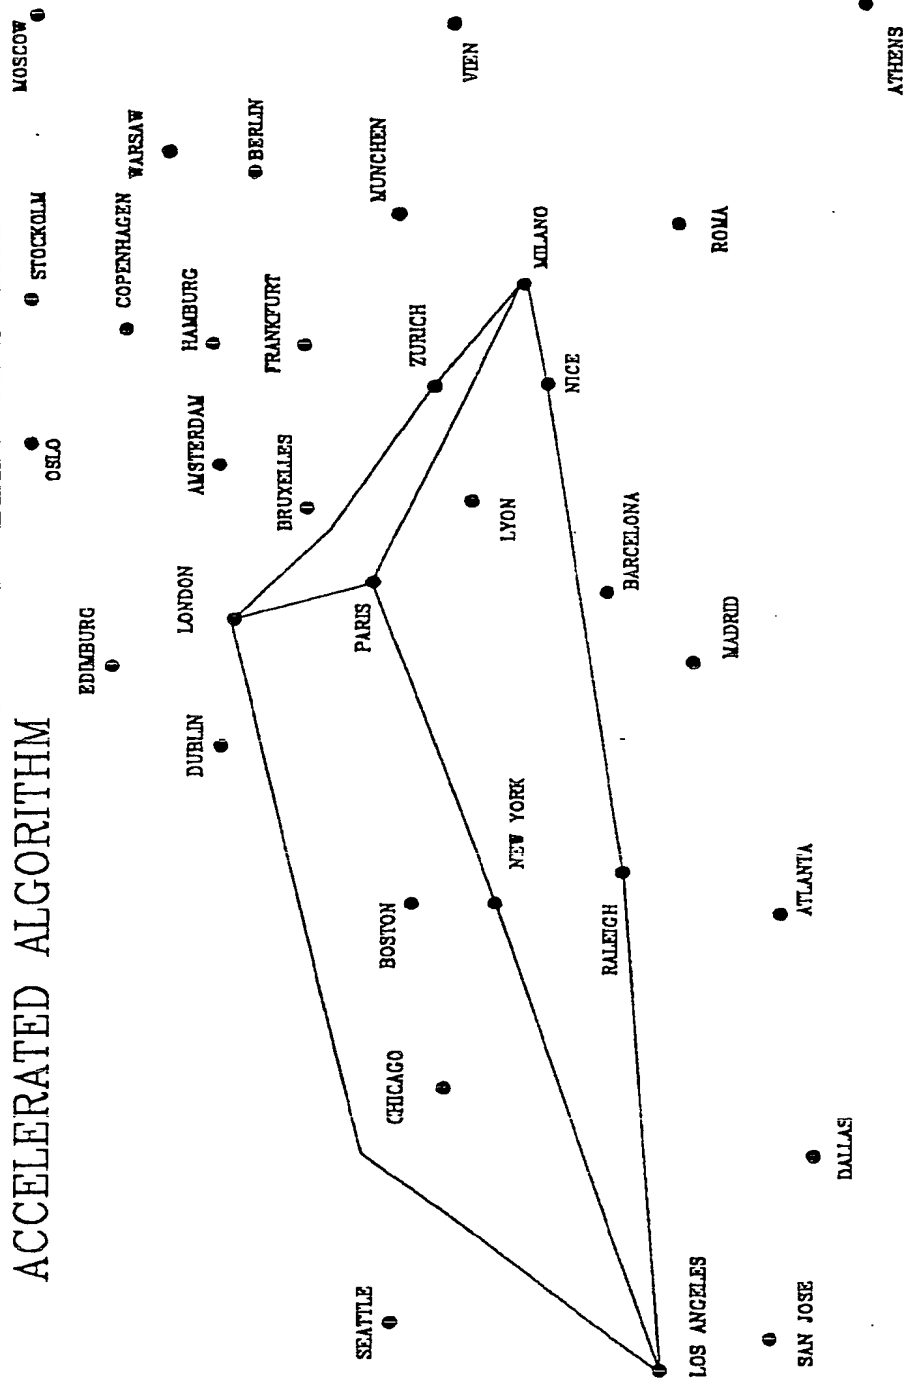

VISITED LINKS DURING SECOND PASS : 10
HOP COUNT : 3

FIGURE 11

PATH SEARCH BETWEEN LOS ANGELES AND MILANO CONVENTIONAL ALGORITHM

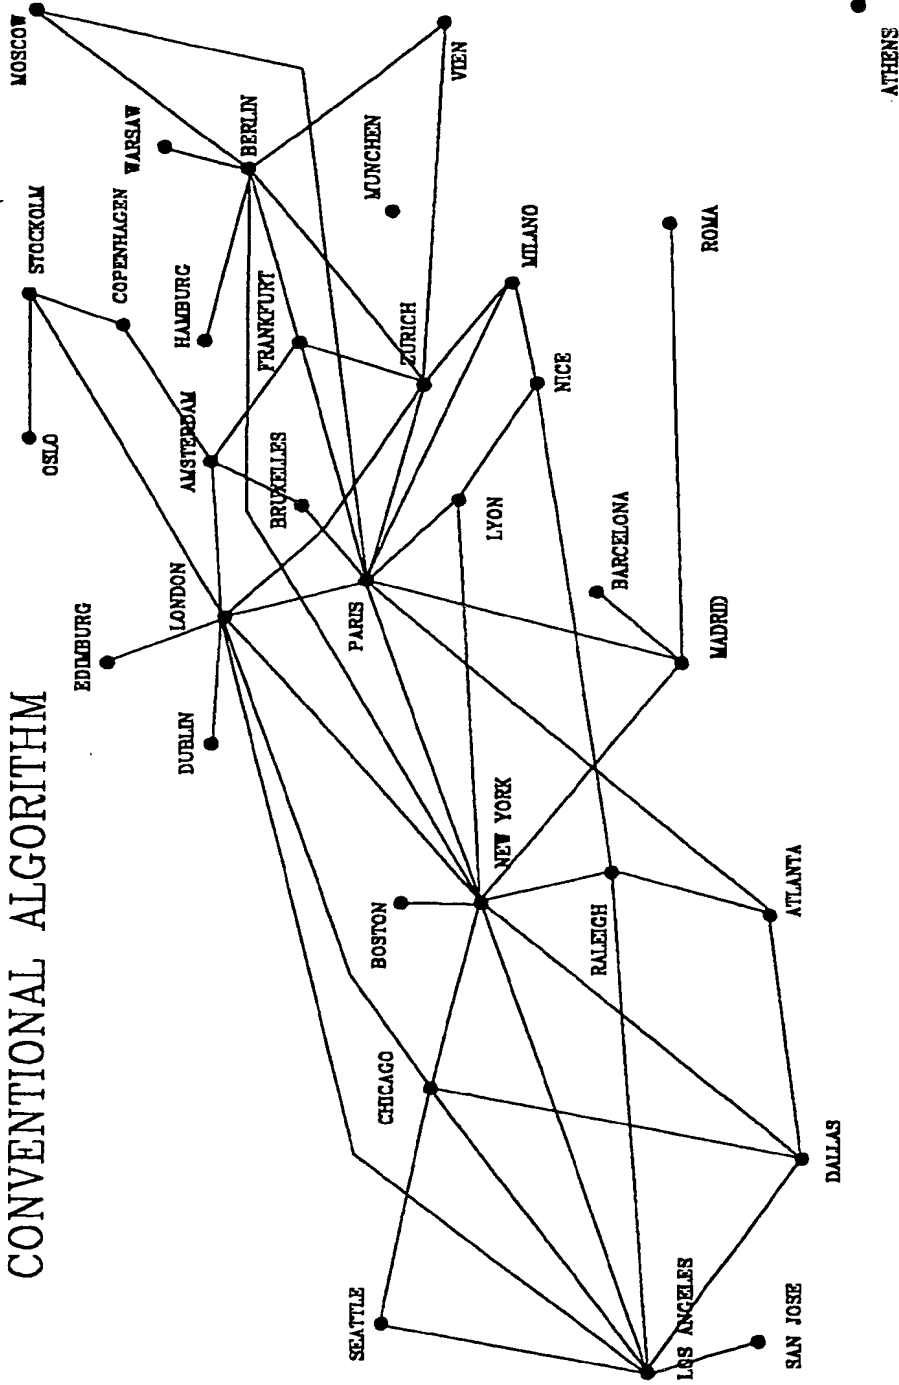

VISITED LINKS DURING SECOND PASS : 54
HOP COUNT : 3

FIGURE 12



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 93 48 0231

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
D,X	EP-A-0 568 477 (INTERNATIONAL BUSINESS MACHINES CO.) * abstract * * page 2, line 30 - page 3, line 2 * * page 5, line 35 - page 6, line 13 * * claims 1,2 * * figures 5-7 * ---	1-10	H04L12/56
A	COMPUTERS AND ELECTRICAL ENGINEERING, vol.10, no.10, 1983, USA pages 183 - 190 J.S. MEDITCH ET AL. 'MINIMUM FLOW HOP ASSIGNMENT AND ROUTING SUBJECT TO AND AVERAGE MESSAGE DELAY CONSTRAINT' * paragraph 1 * -----	1-10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04L
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		15 June 1994	Perez Perez, J
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	

EPO FORM 1503 (03.92) (PecCOI)